



Wooden Log Store Installation Manual


Contents



1 x front trim set

) (,, ,
) (
) (
) (



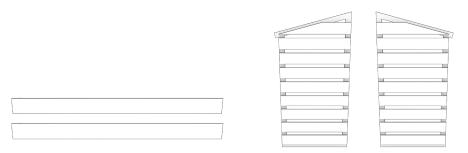

2 x roof fixing battens

1 x left and 1 x right panel



1 x base

1 x screw pack

Tools required

Pozidrive no. 2 screwdriver/cordless screwdriver



~ 2 ~

Introduction

Please take time to read these instructions prior to installing your Wooden Log Store. This will help you understand the product and prevent mistakes being made.

Natural Timber Characteristics

Whilst we try to ensure that our timber products reach you in perfect condition, we have to remember we are dealing with a natural material and there are many characteristics which can arise.

These are completely normal and have no detrimental affect on the product. We also manufacture our products so that most natural defects are inside the product where you wouldn't see them. Wood is a living material and once cut the appearance of cracks, slight movements or changes in colour are normal.

Shake appears like a series of splits. With a timber section of this size, you will always encounter some degree of this (usually on one side). This does not affect the strength of the product and you will find the shake opens in continued warm weather and then closes up when the weather is wet and cooler or there is a lot of moisture in the air.

Pith is similar to the above characteristic and they are quite often found alongside each other. Most of this is typically machined to be on the inside of the product.

Knots are typically found in timber. These are not generally an issue and can actually be beneficial relieving stress points in timber. In many people's opinion these add character to the products.

Cupping is mainly caused by the treatment of the timber. Where timber is kiln dried and then pressure treated it can cause cupping. Although we do limit this, it should not affect the product.

Kit Contents

As you unpack your Log Store make sure Contact our support team if you believe parts that you have all parts required and that their are missing or damaged.

Warning!

condition is satisfactory.

- Risk to young children from enclosed small objects.
- Risk of injury or fatal crushing if loaded product tips. Ensure product is on flat, level, suitable ground.
- Safety glasses and gloves should be worn whilst assembling.
- Two people may be required to assist with assembling until product is self-supporting.

At every point of manufacturing this product, care has been taken to provide quality and satisfaction to our customers. If any part of this kit is missing or damaged then you must contact our support team on **0800 043 0880** before proceeding with assembly of this product.



1. Start on flat ground and use the 65mm screws to secure the side panels to the base.



2. Fix the roof battens to top of side panels with 40mm screws.



3. Next attach the roof with 65mm screws, ensure the side panel is positioned against the edging of the roof panel front and side



4. Fix the rear planks using 40mm screws as shown.



5. Finally fit the fascia trims on the sides and bottom using the 40mm screws











Garden Paradise Perimeter House Napier Road St Leonards-on-Sea East Sussex TN38 9NY

Tel: 0800 043 0880