


www.gardenparadise.net




Wooden Log Store Large 1m + volume

Installation Manual


Contents




1 x middle roof panel 1012mm

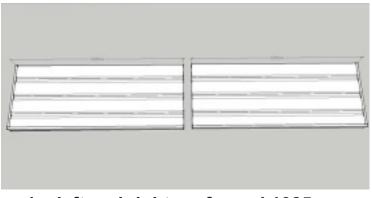

1 x left and right roof panel 1025mm



2 x rear supports




1 x 1 x left and 1 x right panel



2 x side trims 1058mm



3 x base trims 1000mm

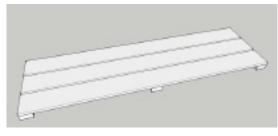

3 x base panels 1 x screw pack

Tools Required
Pozidrive no. 2 screwdriver/cordless screwdriver Pilot drill bit 2-3mm



Introduction

Please take time to read these instructions prior to installing your Wooden Log Store This will help you understand the product and prevent mistakes being made.

Natural Timber Characteristics

Whilst we try to ensure that our timber products reach you in perfect condition, we have to remember we are dealing with a natural material and there are many characteristics which can arise.

These are completely normal and have no detrimental affect on the product. We also manufacture our products so that most natural defects are inside the product where you wouldn't see them. Wood is a living material and once cut, the appearance of cracks, slight movements or changes in colour are normal.

Shake appears like a series of splits. With a timber section of this size, you will always encounter some degree of this (usually on one side). This does not affect the strength of the product and you will find the shake opens in

continued warm weather and then closes up when the weather is wet and cooler or there is a lot of moisture in the air.

Pith is similar to **Shake** and they are quite often found alongside each other. Most of this is typically machined to be on the inside of the product.

Knots are typically found in timber. These are not generally an issue and can actually be beneficial relieving stress points in timber. In many people's opinion these add character to the products.

Cupping is mainly caused by the treatment of the timber. Where timber is kiln dried and then pressure treated it can cause cupping. Although we do limit this, it should not affect the product.

Kit Contents

As you unpack your Log Store make sure that you have all parts required and that their condition is satisfactory. Contact our support team if you believe parts are missing or damaged.


Warning

- Risk to young children from enclosed small objects.
- Risk of injury or fatal crushing if loaded product tips. Ensure product is on flat, level, suitable ground.
- Safety glasses and gloves should be worn whilst assembling.
- Two people may be required to assist with assembling until product is self-supporting.




At every point of manufacturing this product, care has been taken to provide quality and satisfaction to our customers. If any part of this kit is missing or damaged then you must contact our support team on **0800 043 0880** before proceeding with assembly of this product.


1. Consider a location for your log store, ideally it needs to be somewhere flat and out of a prevailing wind. On flat ground use the 65mm screws to secure the side panels to the outside edge of two base panels.

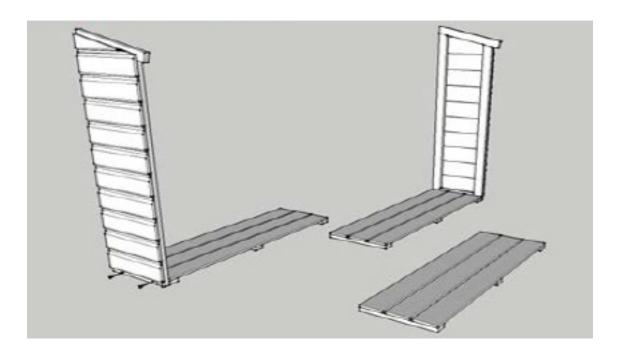


2. Place the base panels neatly together and locate the two roof supports.

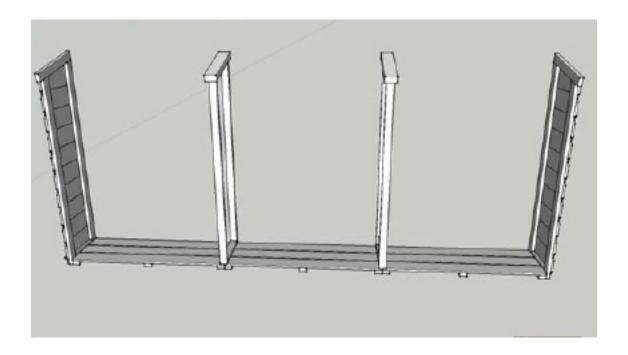


3. Make sure the roof supports are evenly positioned over two base panels and use 6 x 50mm screws provided to fix in place the roof support and join the base panels together.

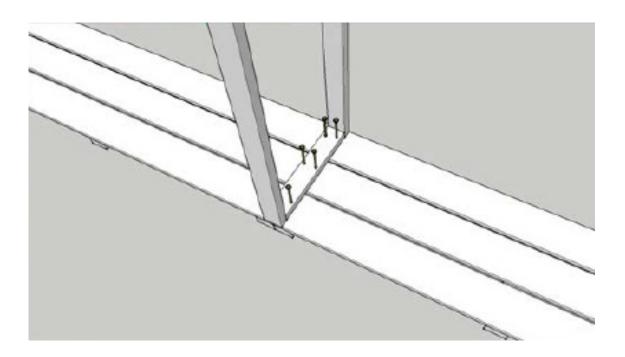


4. Locate the roof panels in the correct order, left panel, center panel, and right panel.

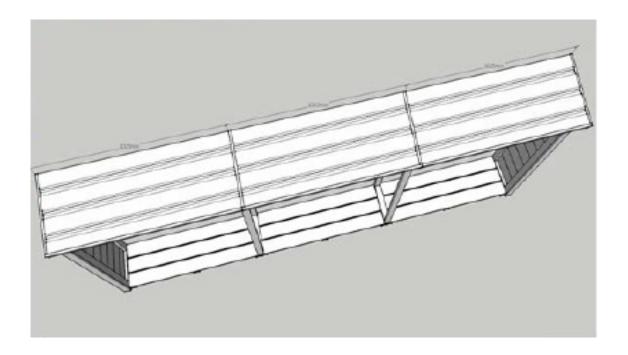


5. Start with one of the side roof panels, make sure the trim sits next to the side panel and the roof is flush at the back with the side panel and roof support. Fix each roof panel in place using 65mm screws provided.

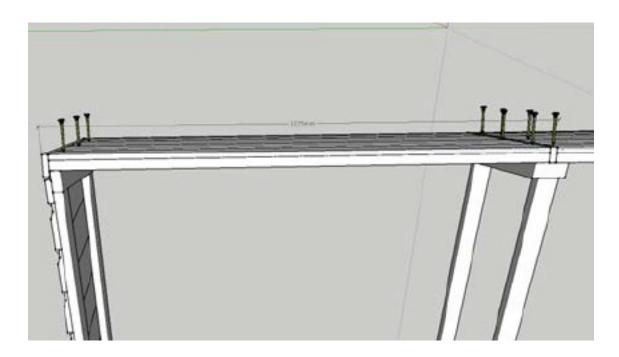


6. Carefully work your way along the roof ensuring it is fully aligned before fixing in place.

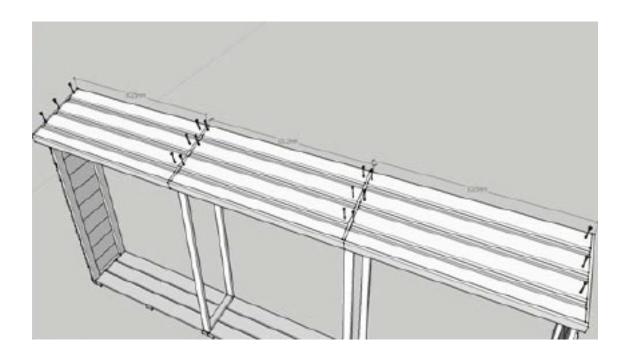


7. Once the roof is fixed in place attach the side panel trims with the 40mm screws provided. It may be necessary to pilot drill a 2-3mm hole for these screws to prevent any timber splitting.

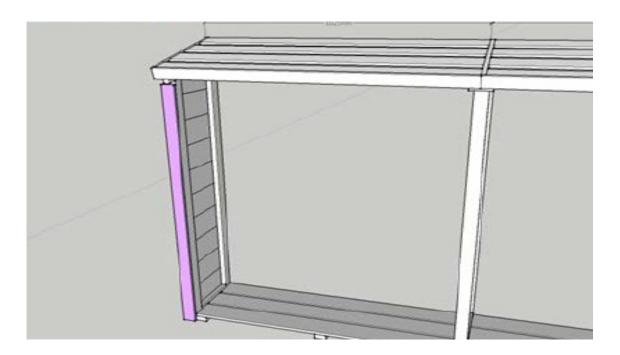


8. Using the same method as above, fix the 1000mm trims to the base panels.

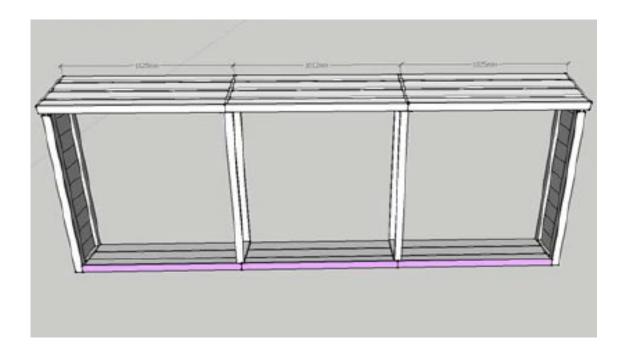

9. Finally fit the rear supports using the 40mm screws.

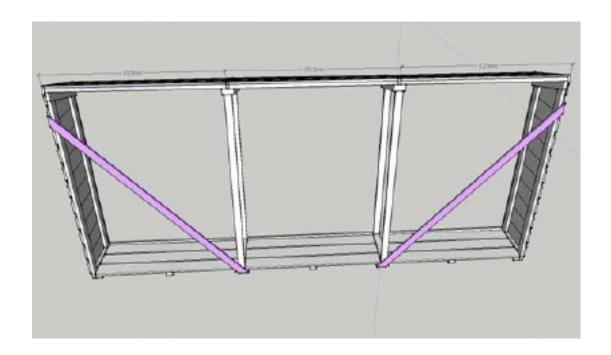

10. The log store is now complete, it is best stored against a wall or fence out of the prevailing wind.

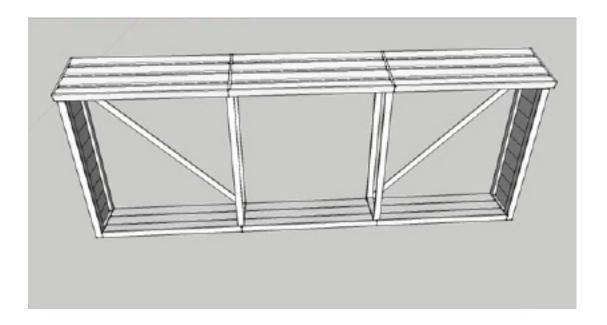



www.gardenparadise.net





Garden Paradise

Perimeter House Napier Road St Leonards-on-Sea East Sussex TN38 9NY

Tel: 0800 043 0880