


INSTRUCTIONS



POOLSAVER™ MANUAL SAFETY COVER USER GUIDE

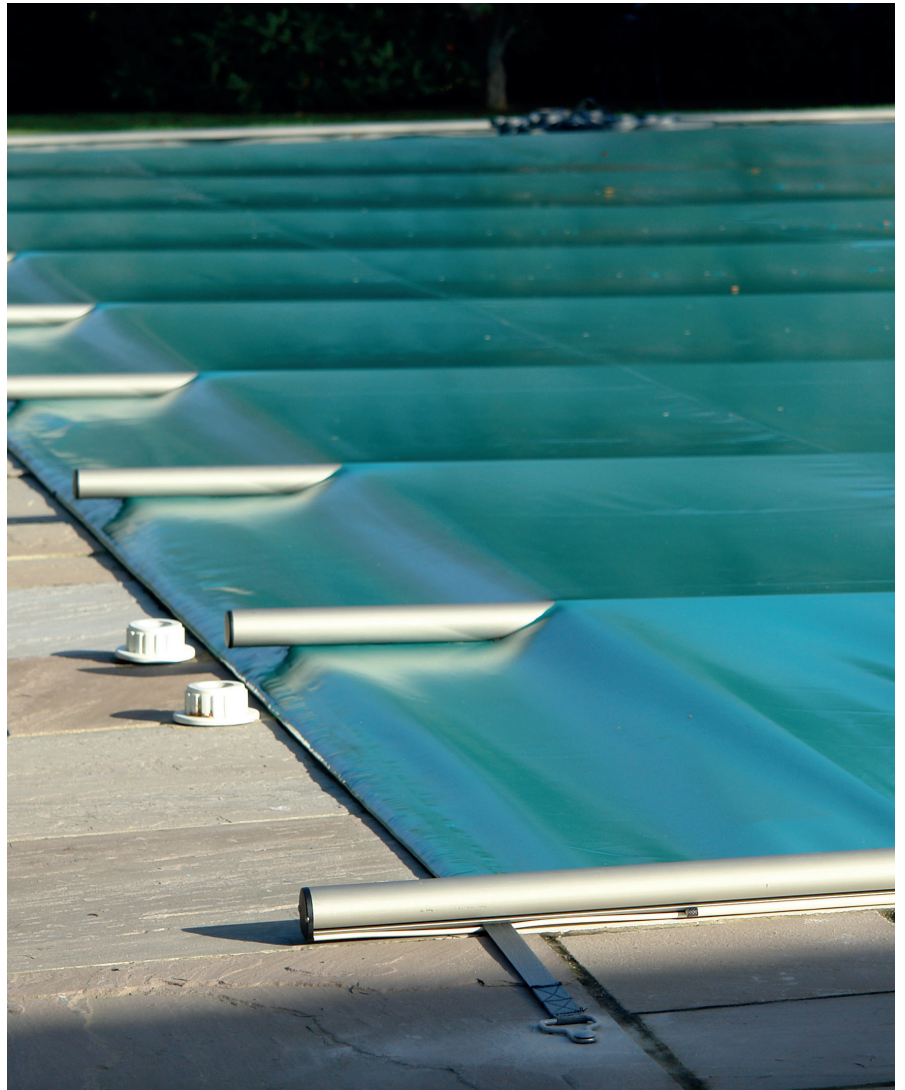

Conditions of Use, Maintenance and Guarantee

Please read full instructions before starting

Packaging

Packing list:

- A rolled up cover.
- One or two manual winders depending on the dimension of your swimming pool.
- One bag containing accessories necessary to install the cover.

To install your POOLSAVER™ MANUAL SAFETY COVER you will need:

- Two people.
- One drill.
- One 14mm masonry drill bit.
- One hammer.

Installation

Put the rolled cover on at the end of the pool where the cover will be stowed.

Unroll the cover using the “unroll strap” fixed to the cover.



IMPORTANT

The cover will have to be centred on the pool before drilling commences.

The cover needs to lie on a minimum of 20cm of coping all around the pool.

Attaching the Cover

Storage end:

1. Position the straps approx 300mm from the cover at the stowed end. *(it is possible if necessary to modify the positioning of the straps on the tube at the end of the cover)*
2. Drill holes in the surround. *(using 14mm drill bit to a depth of 80mm).*
3. Secure the bolt using a hammer, open the bolt manually and put the strap ring over the bolt.



Opposite end:

4. Position yourself at the opposite end of the pool, looking towards the end already attached. Repeat previous procedure to attach the tension straps. Positioning the strap approx 550mm from the cover. *(it is possible if necessary to modify the positioning of the straps on the tube at the end of the cover)*
5. Secure the bolt as indicated previously. Attach the strap ring to the bolt, then join the cover strap to the ratchet. Proceed to tighten the cover by tensioning all ratchet straps evenly.



Tensioning the Cover

Start by tightening the 2 tension straps placed inside the hem on both sides of the cover. Then tension the rest of the straps evenly.

Installation advice

To insure the safety of your family and friends it is imperative to respect the following advice

- The cover will have to be centred on the pool, lying on 20cm all around the pool.
- The bolts must be fixed outside of the pool on a structurally sound base.
- The cover must be correctly tensioned.
- In case there are stairs on the length, use the coping replacement profile.
- Tighten the step section using the straps and tension ratchets.
- Any tension must be done symmetrically and evenly to allow optimal installation and avoid deterioration of the cover.
- For safety and maintenance reasons ensure the water level is 2/3 up skimmer, in order to reduce the flex of the aluminium bars if overloaded (*i.e. snow*). The water level must not be allowed to rise higher than the top of skimmers.
- POOLSAVER™ MANUAL SAFETY COVER is not suitable for overflow (*infinity*) pools.

Using the cover

Removing cover

1. Release the tension of the straps (*only on the opening end.*) Remove the S fixings from the straps. If they remain in place during the rolling of the cover, the steel may damage the material.
2. When fitted with a Roman End, remove the straps and fixings and lay the step section on the main cover. Place the winder into the leading bar to roll up.
3. Allow the “unroll Strap” to roll up evenly inside the cover as it is required to cover the pool.
4. Connect the square connector of the winder in the rolling up bar.
5. Roll up the cover using the winder provided (*use the two winders if cover is bigger than 10 x 5m*). Keep the winder out of the reach of children.

Putting on cover

1. Pull the cover on using the “unroll strap”, standing at the opposite end of the pool to the stowed roll.
Attach the tension straps onto the cover straps, using the S fixings. Tighten the straps in the hemming first.
2. Tensioning must be done symmetrically and evenly to allow optimal installation and avoid deterioration of the cover.
3. In the case of stairs on the length, place the coping replacement profile before putting on the cover.



Maintenance: (responsibility of the pool owner)

- The cleaning of your POOLSAVER™ MANUAL SAFETY COVER must be done at least 4 times a year, using a soft non abrasive non foaming detergent, which contains no solvents.
- Take the cover off the pool to carry out cleaning.
- Abrasive sponges are not suitable.
- For every day maintenance, simply use a hose pipe.
- Periodically (*at least every 3 months*) check the condition of the cover. Especially check the condition of the straps and other fixings affecting the integrity of the cover.
- Do not let snow exceed 20cm on top of the cover. Either remove the snow from the cover or remove the cover before any snow fall.

Safety advice

- Your swimming pool may be a danger to children.
- Any children playing around the pool require constant supervision, even if they can swim.
- Only a responsible adult may operate the cover.
- It is forbidden to walk or jump on the cover.



Guarantee

The POOLSAVER™ MANUAL SAFETY COVER has a guarantee of 1 year in normal use on the aluminium profiles, the membrane, the bolts, tension ratchets, fixing rings and mechanical parts.

Guarantee starts the day of delivery

You are not covered by your guarantee if:

- Wearing is due to abnormal abrasion or rubbing, i.e.: abrasive, rough or bulging coping.
- Overload of snow above 20cm (*see maintenance*).
- Winds stronger than 90km/h
- Water level is incorrect.
- Deterioration due to bad maintenance (*i.e.: using inappropriate cleaning products - see maintenance*).

THANK YOU FOR PURCHASING A RELAX POOLSAVER™ MANUAL SAFETY COVER



The UK's Leading Independent Swimming Pool Manufacturer and Distributor

 www.plasticapools.net Find us on     